hager

These devices are made for controlling automatically of lighting in both the residential and private/public industry sectors. They automatically switch on lighting in case a moving person is detected.

They bring comfort and enhance security for exterior accesses to residential homes, garages and halls. They also guarantee significant savings in lighting power consumption by illuminating only when necessary.
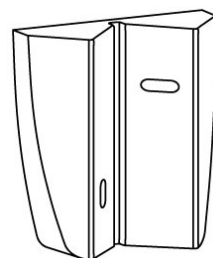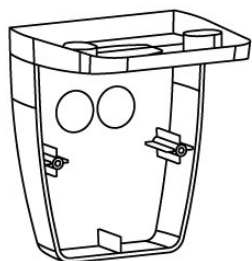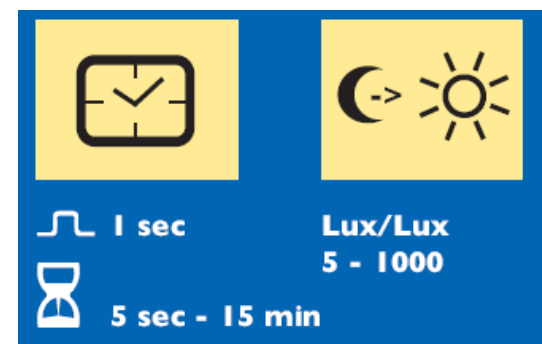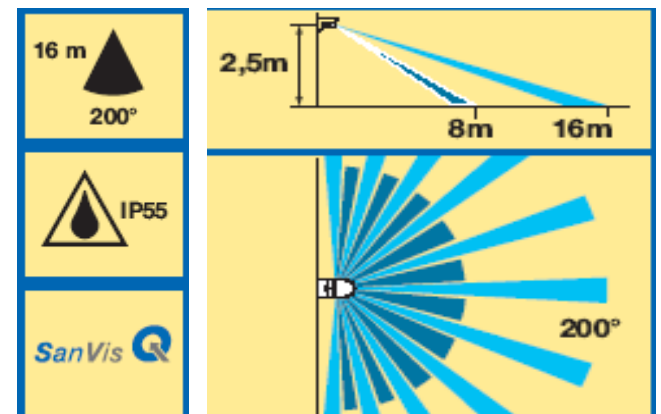
+ Products :	Technical characteristics:
▪ Large range: from 140° basic to 200/360°	▪ Power supply: 230V ~ +10% -15%
▪ An IP55 reinforced waterproofing.	▪ Detection range :
▪ Modern aesthetic for professional market	o 16 m frontal and 6 m left/right (140°)
▪ Various mounting possibilities : wall, ceiling and corner	o 16 m frontal and 8 m left/right (200°)
▪ Easy to wire and install	o diameter 12 m (360°)
▪ Quick Connect	▪ Index of protection: IP55
	▪ Setting of light sensitive level: 5 -> 1000 Lux
	▪ Setting of operation time: 5s -> 15 min
	▪ Relay (switched phase): 10A / 1500W incandescent
	▪ Operating temperature: -20°C, +55°C
	▪ Colours: white, anthracite
	▪ Corner and ceiling bracket sold separately