



# LUMIMAT

## Range overview: motion detectors comfort

These devices are made for controlling automatically lighting in both the residential and private/public industry sectors. They automatically switch on lighting in case a moving person is detected.

They bring comfort and enhance security for exterior accesses to residential homes, garages and halls. They also guarantee significant savings in lighting power consumption by illuminating only when necessary.

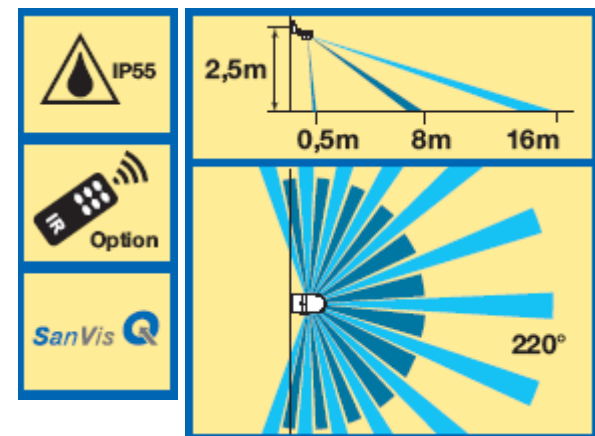

1 sec	Lux/Lux 5 - 1000	Sensibilità Sensibilità min. 20% max. 100%	Option/Opzione Réf./Rif. 52900
5 sec - 30 min			

### + Products :

- Large range: from 140° basic to 220/ TWIN 220/360° comfort
- An IP55 reinforced waterproofing.
- Modern aesthetic for professional market
- Various mounting possibilities : wall, ceiling and corner
- Easy to wire and install
- Quick Connect
- Remote control (additional ref.) for quick installation and settings



### Technical characteristics:

- Power supply: 230V ~ +10% -15%
- Detection range :
  - 16 m frontal and 6 m left/right (140°) + down detection
  - 16 m frontal and 10 m left/right (220°) + down detection
  - 16 m frontal and 10 m left/right (220°) + down detection 360° diameter 6m
- Setting of light sensitive level: 5 -> 1000 Lux
- Setting of operation time : 5s -> 30mn
- Sensibility: min. 20%, max. 100%
- Index of protection: IP55
- Settings via remote control : ref. EE806
- Potential free relay: 16A AC1/ 2300W incandescent
- Operating temperature: -20°C, +55°C
- Colours: white, anthracite, alu, brown
- Corner bracket sold separately